


Komory zlewów do osadzania

D3O3



Powierzchnia komór może być szlifowana, polerowana, trawiona
 Otwory odpływowe od 1 1/2" do 3 1/2", możliwe wykonanie otworu przelewowego
 Osadzenie za pomocą spawania lub zatrzaskowe

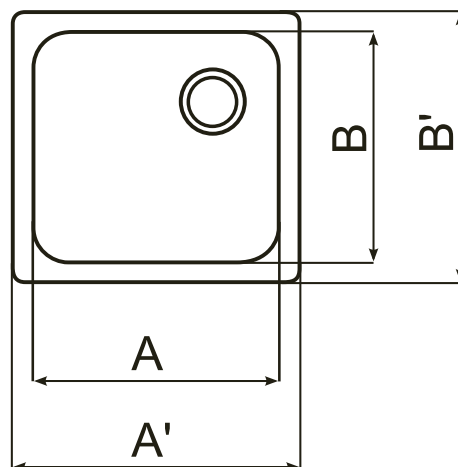

wymiar wew. mm	wymiarzew. mm	wymiar h mm	osadzenie	materiał AISI
330x235	360x265	160	A	304
330x235	360x265	200	A	304
330x330	360x360	160	A	304
330x330	360x360	200	A	304
330x330	360x360	250	A	304
330x330	360x360	160	C	304
330x330	360x360	200	C	304
330x330	360x360	250	C	304
340x290	378x328	200	B	304
340x290	378x328	200	C	304
400x290	438x328	200	B	304
400x290	438x328	200	C	304
400x340	438x378	200	B	304
400x340	438x378	200	C	304
400x340	438x378	250	B	304
400x340	438x378	250	C	304
400x400	438x438	200	B	304
400x400	438x438	200	C	304
400x400	438x438	250	B	304
400x400	438x438	250	C	304
400x400	438x438	300	B	304
400x400	438x438	300	C	304
500x400	538x438	200	B	304
500x400	538x438	200	C	304
500x400	538x438	250	B	304
500x400	538x438	250	C	304
500x400	538x438	300	B	304
500x400	538x438	300	C	304

Osadzenie:

