


## Redukcje do przyspawania ze szwem - Z44AR

Gatunek stali - AISI 304/304L/316/316L/321

dotatkowo mogą być lustrzane, szlifowane, aseptyczne, surowe

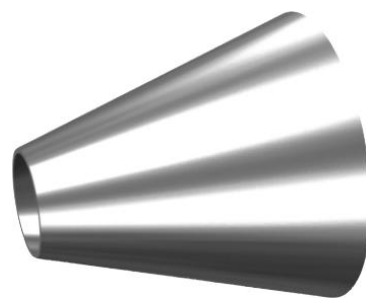

Wymiar DN	Średnica D mm	Średnica d mm	Grubość mm	Wymiar DN	Średnica D mm	Średnica d mm	Grubość mm
15/10	21.30	17.20	1.50; 2.00	65/40	76.10	48.30	2.00; 3.00
-	26.67	21.34	2.11; 2.77	65/50	76.10	60.30	2.00; 3.00
20/10	26.90	17.20	2.00	-	80.00	52.00	1.50
20/15	26.90	21.30	2.00; 3.00	-	80.00	70.00	1.50
25/10	33.70	17.20	2.00	80/25	88.90	33.70	2.00
25/15	33.70	21.30	2.00; 3.00	80/32	88.90	42.40	2.00; 3.00
-	33.70	21.34	2.11	80/40	88.90	48.30	2.00; 3.00
-	33.70	26.67	2.11	80/50	88.90	60.30	2.00; 3.00
25/20	33.70	26.90	2.00; 2.60; 3.00	-	88.90	60.33	3.05
-	34.00	28.00	1.50	80/65	88.90	76.10	2.00; 3.00; 3.20
-	40.00	28.00	1.50	-	101.60	76.10	2.00
-	40.00	34.00	1.50	-	101.60	88.90	2.00
-	42.16	33.40	2.77; 3.38	-	104.00	54.00	2.00
32/15	42.40	21.30	2.00	-	104.00	70.00	2.00
32/20	42.40	26.90	2.00	-	104.00	84.00	2.00
32/25	42.40	33.70	2.00; 3.00	-	108.00	60.30	2.00
-	48.26	33.40	2.77	-	108.00	88.90	2.00; 4.00
-	48.26	42.16	2.77	100/50	114.30	60.30	2.00; 3.00
-	48.30	21.30	2.00	100/65	114.30	76.10	2.00
40/20	48.30	26.90	2.00; 3.00	100/80	114.30	88.90	2.00; 3.00
40/25	48.30	33.70	2.00; 3.00	-	129.00	84.00	2.00
40/32	48.30	42.40	2.00; 3.00	-	129.00	104.00	2.00
-	52.00	28.00	1.50	125/50	139.70	60.30	2.00; 3.00
-	52.00	34.00	1.50	125/65	139.70	76.10	2.00; 3.00
-	52.00	40.00	1.50	125/80	139.70	88.90	2.00; 3.00
-	60.30	21.30	2.00	125/100	139.70	114.30	2.00; 3.00
50/20	60.30	26.90	2.00; 3.00	-	154.00	84.00	2.00
50/25	60.30	33.70	2.00; 3.00	-	154.00	104.00	2.00
50/32	60.30	42.40	2.00; 3.00	-	154.00	129.00	2.00
50/40	60.30	48.30	2.00; 3.00; 3.60	-	159.00	80.00	3.00
-	60.33	26.67	2.77	-	159.00	88.90	2.00
-	60.33	33.40	2.77	-	159.00	108.00	3.00
-	60.33	48.26	2.77	-	159.00	139.70	3.00
-	70.00	40.00	1.50	150/65	168.30	76.10	2.00; 3.00
-	70.00	52.00	1.50	150/80	168.30	88.90	2.00; 3.00
65/25	76.10	33.70	2.00	150/100	168.30	114.30	2.00; 3.00
65/32	76.10	42.40	2.00; 3.00	150/125	168.30	139.70	2.00; 3.00

## Redukcje do przyspawania ze szwem - Z44AR

Wymiar DN	Średnica D mm	Średnica d mm	Grubość mm
-	204.00	104.00	2.00
-	204.00	114.30	2.00
-	204.00	129.00	2.00
-	204.00	154.00	2.00
-	206.00	156.00	3.00
200/100	219.10	114.30	2.00; 6.30
200/125	219.10	139.70	2.00; 3.00
200/125	219.10	159.00	3.00
200/150	219.10	168.30	2.00; 3.00
-	224.00	54.00	2.00
-	254.00	104.00	2.00
-	254.00	154.00	2.00
-	254.00	204.00	2.00
-	256.00	206.00	3.00
250/125	273.00	139.70	2.00; 3.00
250/150	273.00	168.30	2.00; 3.00
250/200	273.00	219.10	3.00
-	304.00	204.00	2.00
-	304.00	254.00	2.00
-	306.00	206.00	3.00
-	306.00	256.00	3.00
300/200	323.90	219.10	2.00; 3.00
300/250	323.90	273.00	3.00
-	355.00	219.10	3.00
-	355.60	219.10	3.00
-	406.00	306.00	3.00
-	406.40	306.00	3.00
-	406.40	323.90	3.00
-	406.40	355.60	3.00
-	508.00	323.90	3.00
-	508.00	355.60	3.00
-	508.00	406.40	3.00